

# Self-Supporting Flat Cable


ID: **Z159**



KABELOVNA Děčín Podmokly s.r.o.  
 Ústecká 840/33, 405 33 Děčín 5  
 Czech Republic  
 DIČ CZ26759993  
 tel.: +420 412 706 222  
 www.kabelovna.cz  
 6.12.2018 ver. 9

## A-D(2ZN)2YT 2×1,7 max. 24F

This cable is suitable for outdoor aerial use or direct burial to sand bed.

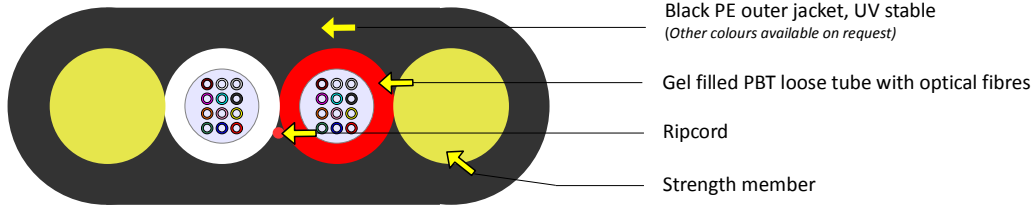

### Mechanical and Environmental properties

Test	Value	Unit	Method
Cable outer diameter	9,1±0,3x 3,8±0,6	mm	EN 60811-203
Cable weight	36	kg/km	
Outer jacket thickness	1,0 ± 0,2	mm	
Loose tube diameter	1,7	mm	
Max. tensile strength	1300	N	EN 60794-1-21-E1
Crush resistance test	4000	N	EN 60794-1-21-E3
Impact resistance test	20	Nm	EN 60794-1-21-E4
Min. bend radius (no load)	10	× OD	EN 60794-1-21-E11a
Min. bend radius (load)	14	× OD	EN 60794-1-21-E11b
Compound flow	pass		EN 60794-1-21-E14
Moisture resistance test	pass		EN 60794-1-22-F5
Temperature range	Installation	-15 to + 50	°C
	Operation	-40 to + 70	°C
	Storage	-40 to + 70	°C

Cable life time - minimum 30 years

### Sheat Marking

Print colour	White
Print method	INK-Jet
Print legend	Manufacturer's name, job number, type of cable, length marking @ 1 m intervals

Other print legends available on request

### Fibre colour coding

According to IEC 60304

1	Red	7	Brown
2	Green	8	Violet
3	Blue	9	Turquoise
4	Yellow	10	Black
5	White	11	Orange
6	Grey	12	Pink

\* with black rings

Other fibre colour sequences available on request

### Tube colour coding

1	Red
2	Natur

Other tubes colour sequences available on request

### Packing

Depending on ordered put-up lengths

SPAN (m)	INSTALATION		NESC LIGHT			NESC MEDIUM			NESC HEAVY		
			sag (m)		load (N)	Sag (m)		load (N)	sag (m)		load (N)
	sag (m)	N	horizontal	vertical		horizontal	vertical		horizontal	vertical	
20	0,3	84	0,47	0,13	478	0,36	0,43	683	0,35	0,59	1066
30	0,5	114	0,81	0,22	628	0,61	0,74	898	0,6	1,01	1419
40	0,6	169	1,12	0,3	809	0,86	1,05	1128			
50	0,8	198	1,51	0,4	940	1,16	1,41	1319			
60	0,9	253	1,86	0,5	1095						
70	1,1	282	2,29	0,61	1215						
80	1,2	338	2,68	0,72	1358						

