

Breakout Cable

ID: **49T1, 49F1**




KABELOVNA Děčín Podmokly s.r.o.
 Ústecká 840/33, 405 33 Děčín 5
 Czech Republic
 DIČ CZ26759993
 tel.: +420 412 706 222
 www.kabelovna.cz

12.2.2019 ver. 6

J-V(ZN)HH 2-24F, Breakout 2,9 mm

This cable is suitable for indoor use.

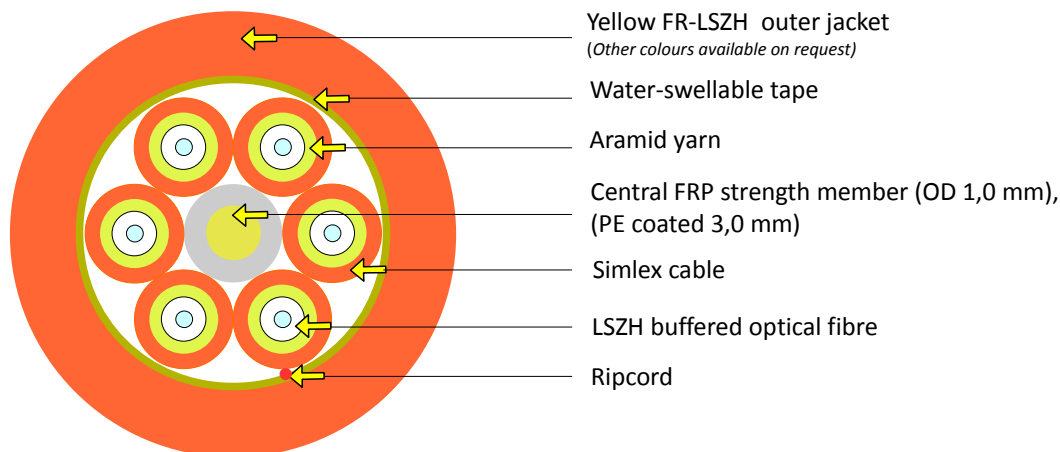

The picture represents a cable with 6 optical fibres.

Mechanical and Environmental properties

Cable outer diameter	4F	9,5 ± 0,4	mm	EN 60811-203
	6F	11,2 ± 0,4		
	8F	13,0 ± 0,4		
	12F	16,7 ± 0,4		
	16F	16,0 ± 0,4		
	18F	17,0 ± 0,4		
	24F	19,7 ± 0,4		
Cable weight	2F	77	kg/km	
	4F	80		
	6F	112		
	8F	152		
	12F	243		
	16F	224		
	18F	247		
24F	334			
Simplex diameter	2,9	mm		
Outer jacket thickness		1	mm	
	2F	550		
Max. tensile strength	4F	850	N	EN 60794-1-21-E1
	6F	1100		
	8F	2100		
	12F	3400		
	16F	3200		
	18F	3200		
	24F	5300		
Crush resistance test	1500	N		EN 60794-1-21-E3
Impact resistance test	10	Nm		EN 60794-1-21-E4
Min. bend radius (no load)	10	× OD		EN 60794-1-21-E11a
Min. bend radius (load)	15	× OD		EN 60794-1-21-E11b
Moisture resistance test		pass		EN 60794-1-22-F5
Temperature range	Installation	-5 to + 50°C		EN 60794-1-22-F1
	Operation	-20 to + 60°C		
	Storage	-20 to + 60°C		
Fire properties – Flammability		pass		EN 60332-3-22 (cat.A)
Fire properties – Acid gases		pass		EN 60754-1
		pass		EN 60754-2
Fire properties – Smoke density		pass		EN 61034-1
		pass		EN 61034-2

Cable life time - minimum 30 years

Buffer

Tight	strip.up to 10cm (49T1)
Free	strip.more than 100cm (49F1)
Colour	Natur
Material	FR-LSZH

Other buffer colours available on request.

Simplex and Outer jacket colour

Jacket material	FR-LSZH	
Jacket colour	SM 9/125	Yellow
	MM 62,5/125 OM1	Grey
Jacket colour	MM 50/125 OM2	Orange
	MM 50/125 OM3	Aqua
	MM 50/125 OM4	Violet
Combination of more than one type of fibre	Black	


Sheat Marking

Print colour	Black
Print method	INK-jet
Print legend	Manufacturer's name, job number, type of cable, length marking @ 1 m intervals

Other print legends available on request

Packing

Depending on ordered put-up lengths

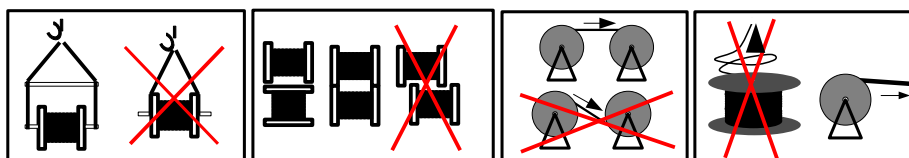

KDP reserves the right to change the values in this document without prior notice. KDP is not responsible for any action taken pursuant to this document. This document is property of KDP. This document or any of its parts are not allowed to be redistributed without explicit consent of KDP.