

All Dielectric Self-Supporting Cable




KABELOVNA Děčín Podmokly s.r.o.
 Ústecká 840/33, 405 33 Děčín 5
 Czech Republic
 DIČ CZ26759993
 tel.: +420 412 706 222
 www.kabelovna.cz

28.1.2019 ver. 8

ID: **N4YI**

ADSS-DQ2Y(ZN)2YT 6kN 6×2,5 max. 72F

This cable is suitable for outdoor aerial use.

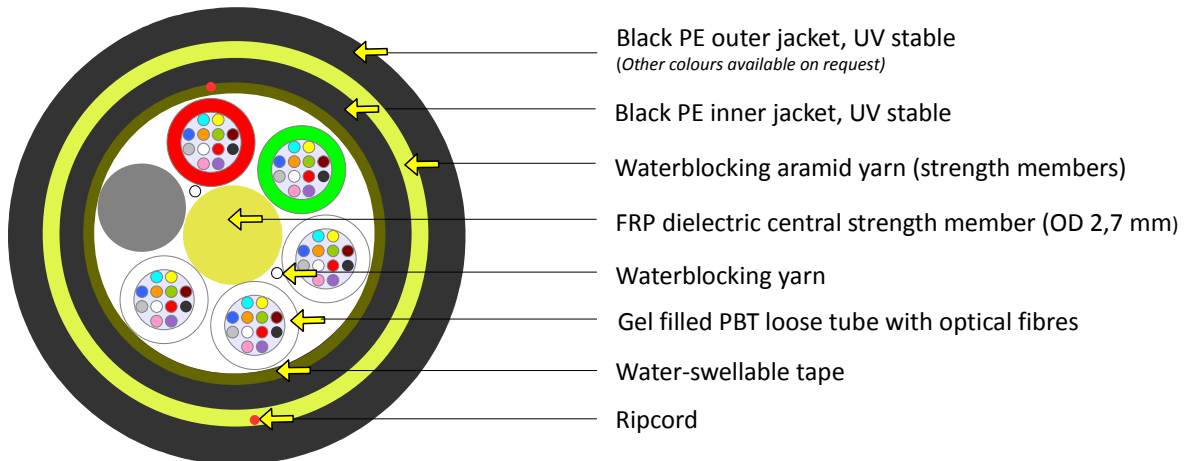

The picture represents a cable with 60 fibres

Mechanical and Environmental properties

Test	Value	Unit	Method
Cable outer diameter	13,8 ± 0,4	mm	EN 60811-203
Cable weight	159	kg/km	
Inner jacket thickness	1	mm	
Outer jacket thickness	1,8	mm	
Loose tube diameter	2,5	mm	
Thermal expansion coefficient	18,7	ppm/K	
Modulus of elasticity	6,91	Gpa	
Maximum allowable tension	6	kN	EN 60794-1-21-E1
Max. operation tension	4,1	kN	EN 60794-1-21-E1
Crush resistance test	3000	N	EN 60794-1-21-E3
Impact resistance test	20	Nm	EN 60794-1-21-E4
Min. bend radius (no load)	15	× OD	EN 60794-1-21-E11a
Min. bend radius (load)	20	× OD	EN 60794-1-21-E11b
Moisture resistance test	pass		EN 60794-1-22-F5
Temperature range	Installation	-15 to + 50	°C
	Operation	-40 to + 70	°C
	Storage	-40 to + 70	°C

Cable life time - minimum 30 years

Sheat Marking

Print colour	White
Print method	INK-Jet or Hot-foil
Print legend	Manufacturer's name, job number, type of cable, length marking @ 1 m intervals

Other print legends available on request

Fibre colour coding

According to IEC 60304

1	Red	7	Brown
2	Green	8	Violet
3	Blue	9	Turquoise
4	Yellow	10	Black
5	White	11	Orange
6	Grey	12	Pink

Other fibre colour sequences available on request

Tube colour coding

1	Red
2	Green
3 – 6	White

In the case of lower number of fibres some tubes are replaced by uncoloured fillers

Other tubes colour sequences available on request

Packing

Depending on ordered put-up lengths

All Dielectric Self-Supporting Cable




KABELOVNA Děčín Podmokly s.r.o.
 Ústecká 840/33, 405 33 Děčín 5
 Czech Republic
 DIČ CZ26759993
 tel.: +420 412 706 222
 www.kabelovna.cz

ID: **N4YI**

28.1.2019 ver. 8

ADSS-DQ2Y(ZN)2YT 6kN 6×2,5 max. 72F

SPAN (m)	INSTALATION		NESC LIGHT			NESC MEDIUM			NESC HEAVY		
			sag (m)		load (N)	Sag (m)		load (N)	sag (m)		load (N)
	Sag 1,5%(m)	N	horizontal	vertical		horizontal	vertical		horizontal	vertical	
40	0,6	501	0,98	0,32	1401	0,69	0,91	1713	0,68	1,21	2527
60	0,9	752	1,61	0,52	1924	1,14	1,51	2328	1,14	2,03	3400
80	1,2	1002	2,29	0,74	2400	1,64	2,16	2890	1,64	2,94	4188
100	1,5	1253	3,02	0,97	2854	2,16	2,85	3421			
120	1,8	1504	3,78	1,22	3283	2,72	3,59	3923			
140	2,1	1754	4,57	1,47	3699						
160	2,4	2005	5,38	1,73	4106						

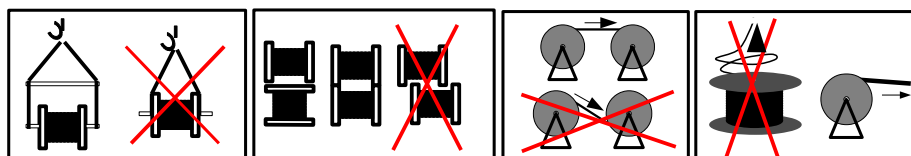

KDP reserves the right to change the values in this document without prior notice. KDP is not responsible for any action taken pursuant to this document. This document is property of KDP. This document or any of its parts are not allowed to be redistributed without explicit consent of KDP.