


# Air Blown Unit

ID: **Z044**

16.10.2023 ver. 11

## Air Blown Unit 2,0mm max. 4F 250um / max. 12 F 200um

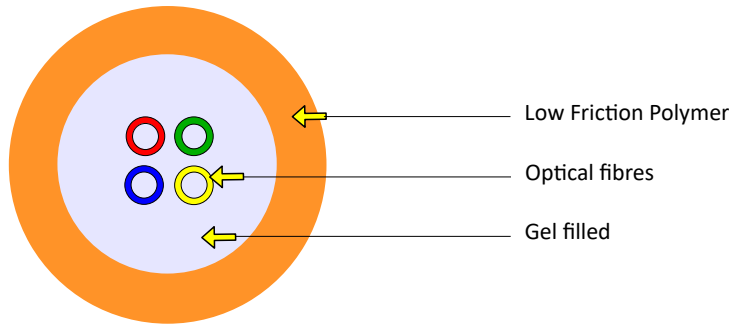

### Mechanical and Environmental properties

Test	Value	Unit	Method
Cable outer diameter	2,0 ± 0,1	mm	EN 60811-203
Cable weight	4F: 3,85 12F: 4,01	kg/km	
Outer jacket thickness	0,4	mm	
Coefficient of friction	0,09	mm	
Max. tensile strength	70	N	EN 60794-1-21-E1
Crush resistance test	1000	N	EN 60794-1-21-E3
Impact resistance test	3	Nm	EN 60794-1-21-E4
Min. bend radius (no load)	10	× OD	EN 60794-1-21-E11a
Min. bend radius (load)	15	× OD	EN 60794-1-21-E11b
Moisture resistance test	pass		EN 60794-1-22-F5
Temperature range	Installation	-5 to + 50	°C
	Operation	-20 to + 70	°C
	Storage	-20 to + 70	°C

Cable life time - minimum 30 years

### Sheat Marking

Print colour	White
Print method	INK-Jet
Print legend	Manufacturer's name, job number, type of cable, length marking @ 1 m intervals

Other print legends available on request

### Fibre colour coding

According to IEC 60304

1	Red	7	Brown
2	Green	8	Violet
3	Blue	9	Turquoise
4	Yellow	10	Black
5	White	11	Orange
6	Grey	12	Pink

Other fibre colour sequences available on request

### Packing

Depending on ordered put-up lengths

