

Uni Tube Cable CST Armoured

ID: **BIPI**




KABELOVNA Děčín Podmokly s.r.o.
 Ústecká 840/33, 405 33 Děčín 5
 Czech Republic
 DIČ CZ26759993
 tel.: +420 412 706 222
 www.kabelovna.cz

2.3.2017 ver.4

A-DQ(BN)2Y(SR)2Y max. 24F

This cable is suitable for outdoor installation.

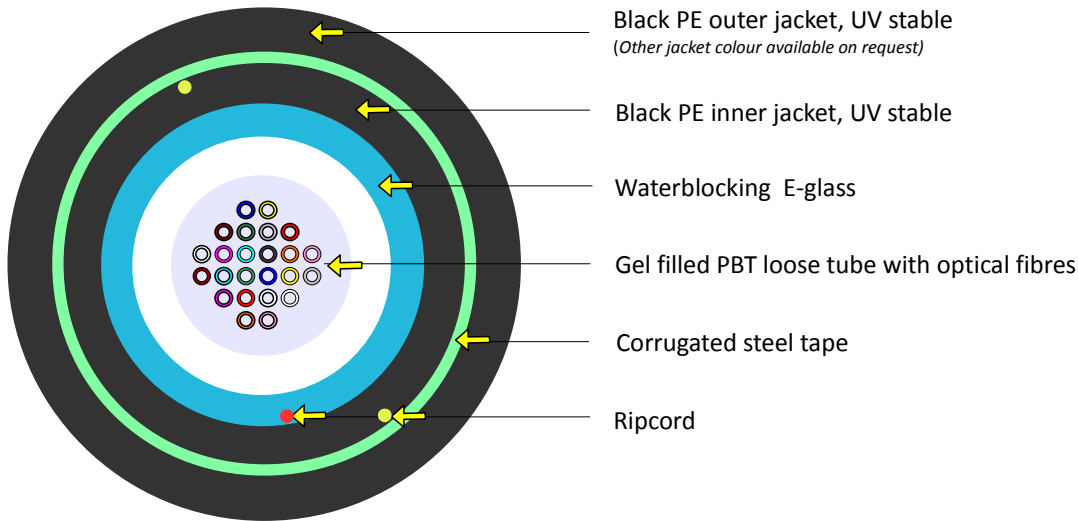

Mechanical and Environmental properties

Test	Value	Unit	Method
Cable outer diameter	10,5±0,4	mm	EN 60811-203
Cable weight	106	kg/km	
Outer jacket thickness	1,5	mm	
Loose tube diameter	3	mm	
Max. tensile strength	1100	N	EN 60794-1-21-E1
Crush resistance test	6000	N	EN 60794-1-21-E3
Impact resistance test	30	Nm	EN 60794-1-21-E4
Min. bend radius (no load)	15	× OD	EN 60794-1-21-E11a
Min. bend radius (load)	20	× OD	EN 60794-1-21-E11b
Moisture resistance test	pass		EN 60794-1-22-F5
Temperature range	Installation	-15 to + 50	°C
	Operation	-20 to + 70	°C
	Storage	-20 to + 70	°C

Cable life time - minimum 30 years

Sheat Marking

Print colour	White
Print method	INK-Jet or Hot-foil
Print legend	Manufacturer's name, job number, type of cable, length marking @ 1 m intervals

Other print legends available on request

Fibre colour coding

According to IEC 60304

1 Red	7 Brown	13 Red*	19 Brown*
2 Green	8 Violet	14 Green*	20 Violet*
3 Blue	9 Turquoise	15 Blue*	21 Turquoise*
4 Yellow	10 Black	16 Yellow*	22 Natur*
5 White	11 Orange	17 White*	23 Orange*
6 Grey	12 Pink	18 Grey*	24 Pink*

*with black rings

Other fibre colour sequences available on request

Packing

Depending on ordered put-up lengths

