

MLT Blown Micro Cable

ID: **Z108**




KABELOVNA Děčín Podmokly s.r.o.
 Ústecká 840/33, 405 33 Děčín 5
 Czech Republic
 DIČ CZ26759993
 tel.: +420 412 706 222
 www.kabelovna.cz

22. 4. 2021 ver.8

A-DQ2Y 16×1,5 max. 192F

This cable is suitable for Air-blowing.

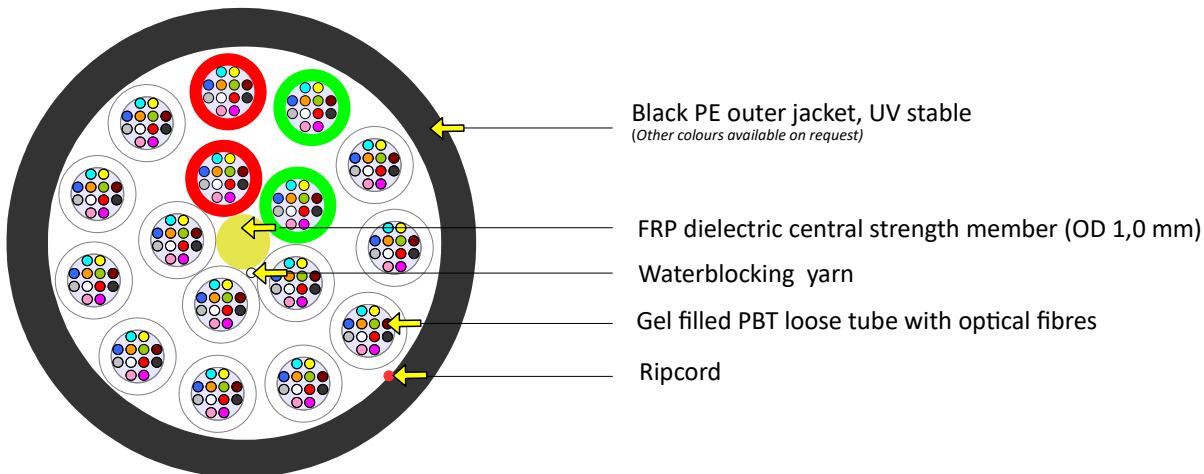

Mechanical and Environmental properties

Test	Value	Unit	Method
Cable outer diameter	8,0±0,3	mm	EN 60811-203
Cable weight	53,1	kg/km	
Outer jacket thickness	0,5	mm	
Loose tube diameter	1,5	mm	
Max. tensile strength	700	N	EN 60794-1-21-E1
Crush resistance test	1500	N	EN 60794-1-21-E3
Impact resistance test	15	Nm	EN 60794-1-21-E4
Min. bend radius	15	× OD	EN 60794-1-21-E11
Moisture resistance test	pass		EN 60794-1-22-F5
Temperature range	Installation	-15 to +50	°C
	Operation	-30 to +70	°C
	Storage	-40 to +70	°C
EN 60794-1-22-F1			

Cable life time - minimum 30 years

Sheat Marking

Print colour	White
Print method	INK-Jet or Hot-foil
Print legend	Manufacturer's name, job number, type of cable, length marking @ 1 m intervals

Other print legends available on request

Fibre colour coding

According to IEC 60304

1	Red	7	Brown
2	Green	8	Violet
3	Blue	9	Turquoise
4	Yellow	10	Black
5	White	11	Orange
6	Grey	12	Pink

Other fibre colour sequences available on request

Tube colour coding

1	Red	6	Red
2	Green	7	Green
3-5	White	8-16	White

In the case of lower number of fibres some tubes are replaced by uncoloured fillers

Other tubes colour sequences available on request

Packing

Depending on ordered put-up lengths

